




N 92 CU PE 75 Ohm Coaxial Cable Trunk Cable



Rev. 26 July 2004

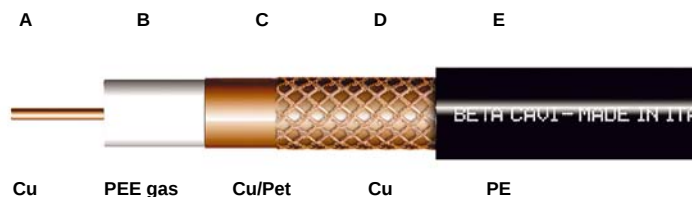

Construction and Dimensions

	materials	dimensions mm	tolerance mm
A. Inner conductor : Solid soft annealed copper	Cu	2,20	±0,02
B. Dielectric : Foam polyethylene gas injected	PEE gas	9,20	±0,10
C. Outer conductor Foil : Copper/Polyester	Cu/Pet	100%	
D. Braid : Bare copper wire Coverage : Visual coverage	Cu	46%	
E. Sheath PE UV resistant	PE	12,70	±0,20

Electrical Characteristics

Impedance :		75±2	Ω
Capacitance :		52±2	pF/m
Velocity ratio :		0,85	pF/m
Voltage test of dielectric :		2	kVdc
Voltage test of sheath :		2	kVdc
Resistance at 20° C	Inner conductor	4,5	Ω/km
	Outer conductor	9.5	Ω/km

Attenuation at 20° C

MHz	dB/100m	MHz	dB/100m	MHz	dB/100m	MHz	dB/100m
50	2,0	862	9,1	1750	13,6	3000	18,7
200	4,1	1000	9,9	2150	15,3		
450	6,4	1350	11,7	2400	16,4		

Return Loss SRL


5-460	MHz	> 30 dB
460-1000	MHz	> 28 dB
1000-3000	MHz	> 26 dB

Screening Efficiency

5-30	MHz	> 70 dB
30-1000	MHz	> 85 dB
1000-2150	MHz	> 85 dB

Mechanical Characteristics

Minimum static bending radius :	130	mm
Total weight :	122,60	g/m
Operating temperature :	-40°C to +70°C	

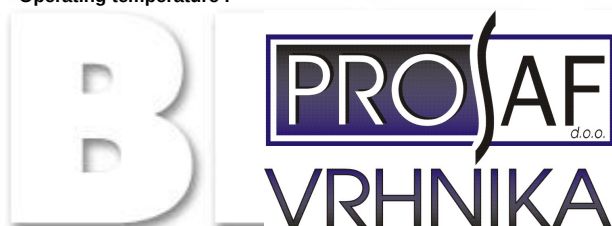

PODJETJE ZA PROIZVODNJO,
TRGOVINO, STORITVE IN INŽENIRING
POD HRUŠEVCO 30, 1360 VRHNIKA
www.pro-saf.si pro.saf@siol.net
TEL: 01/750 28 28
FAX: 01/750 28 29